arXiv:1208.2322v1 [math.OC] 11 Aug 2012

Optimal Control Design under Structured Model Information Limitation Using Adaptive Algorithms*

Farhad Farokhi and Karl H. Johansson †

Abstract

Networked control strategies based on limited information about the plant model usually results in worse closed-loop performance than optimal centralized control with full plant model information. Recently, this fact has been established by utilizing the concept of competitive ratio, which is defined as the worst case ratio of the cost of a control design with limited model information to the cost of the optimal control design with full model information. In this paper, we show that with an adaptive networked controller with limited plant model information, it is indeed possible to achieve a competitive ratio equal to one. We show that an adaptive controller introduced by Campi and Kumar asymptotically achieves closed-loop performance equal to the optimal centralized controller with full model information. The plant model considered in the paper belongs to a compact set of stochastic linear time-invariant systems and the closed loop performance measure is the ergodic mean of a quadratic function of the state and control input. We illustrate the applicability of the results numerically on a vehicle platooning problem.

1 Introduction

Networked control systems are often complex large-scale engineered systems, such as power grids [1], smart infrastructures [2], intelligent transportation systems [3–5], or future aerospace systems [6, 7]. These systems consists of several subsystems each one often having many unknown parameters. It is costly, or even unrealistic, to accurately identify all these plant model parameters offline. This fact motivates us to focus on optimal control design under structured parameter uncertainty and limited plant model information constraints.

There are some recent studies in optimal control design with limited plant model information [8–14]. The problem was initially addressed in [8] for designing static centralized controllers for a class of discrete-time linear time-invariant systems composed of scalar subsystem, where control strategies with various degrees of model information were compared using competitive ratio; i.e., the worst case ratio of the cost of a control design with limited model information scaled by the cost of the optimal control design with full model information. The result was generalized to static decentralized controller for a class of systems composed of fully-actuated subsystems of arbitrary order in [9, 10]. More recently, the problem of designing optimal H_2 dynamic controllers using limited plant model information was considered in [11]. It was shown that, when relying on local model information, the smallest competitive ratio achievable for any control design strategy for distributed linear time-invariant controllers is strictly greater than one; specifically, equal to square root of two when the B-matrix was assumed to be the identity matrix.

In this paper, we generalize the set of applicable controllers to include adaptive controllers. We use the ergodic mean of a quadratic function of the state and control as a performance measure of the closed-loop system. Choosing this closed-loop performance measure allows us to use certain adaptive algorithms available in the literature [15–18]. In particular, we consider an adaptive controller proposed by Campi and Kumar [15]. We prove that the smallest competitive ratio that a control design strategy using adaptive controllers can achieve is equal one. This shows that, although the design of each subcontroller is only relying on local model information, the closed-loop performance can still be as good as the optimal control design strategy with full model information.

---

[*] The work was supported by the Swedish Research Council and the Knut and Alice Wallenberg Foundation.

[†] ACCESS Linnaeus Center, School of Electrical Engineering, KTH Royal Institute of Technology, Stockholm, Sweden. Emails:{farokhi,kallej}@ee.kth.se

The rest of the paper is organized as follows. In Section 2, we present the mathematical problem formulation. In Section 3, we introduce the Campi–Kumar adaptive controller using only local model information and we show that it achieves a competitive ration equal to one. We use this adaptive algorithm on a vehicle platooning problem to demonstrate its performance numerically in Section 4 and we conclude the paper in Section 5.

1.1 Notation

The sets of natural and real numbers are denoted by $\mathbb{N}$ and $\mathbb{R}$, respectively. We define $\mathbb{N}_0 = \mathbb{N} \cup \{0\}$. Additionally, all other sets are denoted by calligraphic letters such as $\mathcal{P}$ and $\mathcal{A}$. For any given sets $\mathcal{X}$ and $\mathcal{Y}$, the notation $\mathcal{M}(\mathcal{X}, \mathcal{Y})$ denotes the set of all mappings from the set $\mathcal{X}$ to the set $\mathcal{Y}$. In addition, for any $k \in \mathbb{N}_0$, we define $\mathcal{P}_k(\mathcal{X})$ as the set of all subsets of $\mathcal{X}$ containing exactly k elements.

Matrices are denoted by capital roman letters such as A. The entry in the i^{th} row and the j^{th} column of matrix A is a_{ij}. A_{ij} denotes a submatrix of matrix A, the dimension and the position of which will be defined in the text.

$A > (\geq) 0$ means symmetric matrix $A \in \mathbb{R}^{n\times n}$ is positive definite (positive semidefinite) and $A > (\geq) B$ means $A - B > (\geq) 0$. Let $\mathcal{S}^n_{++}$ ($\mathcal{S}^n_{+}$) be the set of symmetric positive definite (positive semidefinite) matrices in $\mathbb{R}^{n\times n}$.

Let matrices $A \in \mathbb{R}^{n\times n}$, $B \in \mathbb{R}^{n\times m}$, $Q \in \mathcal{S}^n_{+}$, and $R \in \mathcal{S}^m_{++}$ be given such that the pair (A, B) is controllable and the pair $(A, Q^{1/2})$ is observable. We define $\mathbf{P}(A, B, Q, R)$ as the unique positive definite solution of the discrete algebraic Riccati equation

$$P = A^\top P A - A^\top P B \left(B^\top P B + R\right)^{-1} B^\top P A + Q.$$

In addition, we define

$$\mathbf{L}(A, B, Q, R) = -\left(B^\top \mathbf{P}(A, B, Q, R) B + R\right)^{-1} B^\top \mathbf{P}(A, B, Q, R) A.$$

When matrices Q and R are not relevant or can be deduced from the text, we use $\mathbf{P}(A, B)$ and $\mathbf{L}(A, B)$ instead of $\mathbf{P}(A, B, Q, R)$ and $\mathbf{L}(A, B, Q, R)$, respectively.

A measurable function $f : \mathcal{Z} \to \mathbb{R}$ is said to be essentially bounded if there exists a constant $c \in \mathbb{R}$ such that $|f(z)| \leq c$ almost everywhere. The greatest lower bound of these constants is called the essential supremum of $f(z)$, which is denoted by $\text{ess}\sup_{z\in\mathcal{Z}} f(z)$.

All graphs G considered in this paper are directed with vertex set $\{1, ..., N\}$ for a given $N \in \mathbb{N}$. The adjacency matrix $S \in \{0, 1\}^{N\times N}$ of G is a matrix whose entry $s_{ij} = 1$ if $(j, i) \in E$ and $s_{ij} = 0$, otherwise, for all $1 \leq i, j \leq N$.

Let mappings $f, g : \mathbb{Z} \to \mathbb{R}$ be given. Denote $f(k) = O(g(k))$ if $\limsup_{k\to\infty} |f(k)/g(k)| < \infty$. Similarly, $f(k) = o(g(k))$ if $\limsup_{k\to\infty} |f(k)/g(k)| = 0$.

Finally, χ denotes the characteristic function, that is, it returns a value equal one if its statement is satisfied and a value equal zero otherwise.

2 Problem Formulation

2.1 Plant Model

Consider a discrete-time linear time-invariant dynamical system composed of N subsystems, such that the state-space representation of subsystems i, $1 \leq i \leq N$, is given by

$$x_i(k+1) = \sum_{j=1}^{N} A_{ij} x_j(k) + B_{ii} u_i(k) + w_i(k);\ x_i(0) = 0,$$

where $x_i(k) \in \mathbb{R}^{n_i}$, $u_i(k) \in \mathbb{R}^{m_i}$, and $w_i(k) \in \mathbb{R}^{n_i}$ are state, control input, and exogenous input vectors, respectively. We assume that $\{w_i(k)\}_{k=0}^{\infty}$ are independent and identically distributed Gaussian random variables with zero means $\mathbb{E}\{w_i(k)\} = 0$ and unit covariances $\mathbb{E}\{w_i(k)w_i(k)^\top\} = I$. In addition, let $w_i(k)$ and $w_j(k)$ be statistically independent for all $1 \leq i \neq j \leq N$. We introduce the augmented system as

$$x(k+1) = Ax(k) + Bu(k) + w(k);\ x(0) = 0,$$

where the augmented state, control input, and exogenous input vectors are

$$\begin{aligned} x(k)^\top &= [x_1(k)^\top \ \dots \ x_N(k)^\top]^\top \in \mathbb{R}^n, \\ u(k)^\top &= [u_1(k)^\top \ \dots \ u_N(k)^\top]^\top \in \mathbb{R}^m, \\ w(k)^\top &= [w_1(k)^\top \ \dots \ w_N(k)^\top]^\top \in \mathbb{R}^n, \end{aligned}$$

with $n = \sum_{i=1}^N n_i$ and $m = \sum_{i=1}^N m_i$. In addition, the augmented model matrices are

$$B = \mathrm{diag}(B_{11}, \dots, B_{NN}) \in \mathcal{B} \subset \mathbb{R}^{n \times m},$$

and

$$A = \begin{bmatrix} A_{11} & \cdots & A_{1N} \\ \vdots & \ddots & \vdots \\ A_{N1} & \cdots & A_{NN} \end{bmatrix} \in \mathcal{A} \subset \mathbb{R}^{n \times n}.$$

Let a directed plant graph $G_\mathcal{P}$ with its associated adjacency matrix $S_\mathcal{P}$ be given.The plant graph $G_\mathcal{P}$ captures the interconnection structure of the plants, that is, $A_{ij} \neq 0$ only if $(s_\mathcal{P})_{ij} \neq 0$. Hence, the set $\mathcal{A}$ is structured by the plant graph:

$$\mathcal{A} \subseteq \{A \in \mathbb{R}^{n \times n} \mid (s_\mathcal{P})_{ij} = 0 \Rightarrow A_{ij} = 0 \in \mathbb{R}^{n_i \times n_j} \text{ for all } i, j \text{ such that } 1 \leq i, j \leq N\}.$$

Note that the set $\mathcal{A} \times \mathcal{B}$ is isomorph to the set of all plants of interest $\mathcal{P}$, say. Hence, from now on, we present a plant with its pair of corresponding model matrices as $P = (A, B)$ and denote $\mathcal{P} = \mathcal{A} \times \mathcal{B}$. We make the following assumption on the set of all plants:

Assumption 2.1 *The set $\mathcal{A} \times \mathcal{B}$ is a compact set (with nonzero Lebesgue measure) and the pair (A, B) is controllable for all $(A, B) \in \mathcal{A} \times \mathcal{B}$ (except for possibly a set with zero Lebesgue measure).*

2.2 Adaptive Controller

We consider infinite-dimensional nonlinear time-invariant controllers $\mathbf{K}$ with control law

$$u(k) = \mathbf{K}(\mathcal{F}_k), \qquad \forall\, k \in \mathbb{N}_0,$$

where $\mathcal{F}_k = \sigma(\{x(t)\}_{t=0}^k \cup \{u(t)\}_{t=0}^{k-1})$ is the sigma algebra generated by the observation history. Hence, each controller is a mapping $\mathbf{K} : \mathcal{E}^{n,m} \to \mathbb{R}^m$, where

$$\mathcal{E}^{n,m} = \bigcup_{k=0}^{\infty} \bigcup_{\mathcal{X} \in \mathcal{P}_k(\mathbb{R}^n)} \bigcup_{\mathcal{U} \in \mathcal{P}_{k-1}(\mathbb{R}^m)} \sigma(\mathcal{X} \cup \mathcal{U}).$$

The set of all admissible controllers $\mathcal{K}$ can be captured as the set of mappings from $\mathcal{E}^{n,m}$ to $\mathbb{R}^m$, or, equivalently, $\mathcal{K} = \mathcal{M}(\mathcal{E}^{n,m}, \mathbb{R}^m)$.

2.3 Control Design Strategy

A control design strategy Γ is a mapping from the set of plants $\mathcal{P} = \mathcal{A} \times \mathcal{B}$ to the set of admissible controllers $\mathcal{K}$. We can partition Γ using the control input size as

$$\Gamma = \begin{bmatrix} \Gamma_1 \\ \vdots \\ \Gamma_N \end{bmatrix},$$

where, for each $1 \leq i \leq N$, we have $\Gamma_i : \mathcal{A} \times \mathcal{B} \to \mathcal{M}(\mathcal{E}^{n,m}, \mathbb{R}^{m_i})$. Let a directed design graph $G_\mathcal{C}$ with its associated adjacency matrix $S_\mathcal{C}$ be given. We say that the control design strategy Γ satisfies the limited model information constraint enforced by the design graph $G_\mathcal{C}$ if, for all $1 \leq i \leq N$, Γ_i is only a function of

$$\{[A_{j1} \ \dots \ A_{jN}], B_{jj} \mid (s_\mathcal{C})_{ij} \neq 0\}.$$

The set of all control design strategies that obey the structure given by the design graph $G_\mathcal{C}$ is denoted by $\mathcal{C}$.

2.4 Performance Metric

In this paper, we are interested in minimizing the performance criterion

$$J_P(\mathbf{K}) = \limsup_{T\to\infty} \frac{1}{T} \sum_{k=0}^{T-1} x(k)^\top Q x(k) + u(k)^\top R u(k), \tag{1}$$

where $Q \in \mathcal{S}_+^n$ and $R \in \mathcal{S}_{++}^n$. We make the following assumption concerning the performance criterion:

Assumption 2.2 *For all $A \in \mathcal{A}$, the pair $(A, Q^{1/2})$ is observable (except for possibly a set with zero Lebesgue measure).*

Note that for linear controllers the performance measure (1) represents the H_2-norm of the closed-loop system from exogenous input $w(k)$ to output

$$y(k) = Q^{1/2}x(k) + R^{1/2}u(k).$$

DEFINITION 2.1 *Let a plant graph $G_\mathcal{P}$ and a design graph $G_\mathcal{C}$ be given. Assume that, for every plant $P \in \mathcal{P}$, there exists an optimal controller $\mathbf{K}^*(P) \in \mathcal{K}$ such that*

$$J_P(\mathbf{K}^*(P)) \leq J_P(\mathbf{K}), \qquad \forall\, \mathbf{K} \in \mathcal{K}.$$

The average competitive ratio *of a control design method Γ is defined as*

$$r_\mathcal{P}^{\text{ave}}(\Gamma) = \int_\mathcal{P} \frac{J_P(\Gamma(P))}{J_P(\mathbf{K}^*(P))} f(P)\, \mathrm{d}P, \tag{2}$$

where $f : \mathcal{P} \to \mathbb{R}$ is a positive-definite continuous function which shows the relative importance of plants in $\mathcal{P}$. Without loss of generality, we assume that $\int_\mathcal{P} f(P)\mathrm{d}P = 1$. The supremum competitive ratio *of a control design method Γ is defined as*

$$r_\mathcal{P}^{\text{sup}}(\Gamma) = \operatorname*{ess\,sup}_{P\in\mathcal{P}} \frac{J_P(\Gamma(P))}{J_P(\mathbf{K}^*(P))}. \tag{3}$$

The mapping $\mathbf{K}^*$ is not required to lie in the set $\mathcal{C}$, and is obtained by searching over the set of centralized controllers. Hence, $\mathbf{K}^*(P) = \mathbf{L}(A, B)$, for all plants $P = (A, B) \in \mathcal{P}$.

The supremum competitive ratio $r_\mathcal{P}^{\text{sup}}$ is a modified version of the competitive ratio considered in [8–14]. Note that using essential supremum in (3), we are neglecting a subset of plants with zero Lebesgue measure. However, this is not crucial for practical purposes, because the probability of these plants appearing in a real situation is slim. As a starting point, let us prove a very interesting property relating the average and supremum competitive ratios.

LEMMA 2.1 *For any control design strategy $\Gamma \in \mathcal{C}$, we have $1 \leq r_\mathcal{P}^{\text{ave}}(\Gamma) \leq r_\mathcal{P}^{\text{sup}}(\Gamma)$.*

Proof: See Appendix A. ■

In this paper, we are interested in solving the optimization problem

$$\arg\min_{\Gamma\in\mathcal{C}} r_\mathcal{P}(\Gamma), \tag{4}$$

where $r_\mathcal{P}$ is either $r_\mathcal{P}^{\text{ave}}$ or $r_\mathcal{P}^{\text{sup}}$. This problem was studied in [11] when the set of plants is fully-actuated discrete-time linear time-invariant systems and the set of admissible controllers is finite-dimensional discrete-time linear dynamic time-invariant systems. It was shown that a modified deadbeat control strategy (which constructs static controllers) is a minimizer of the competitive ratio. Specifically, it was proved that the smallest competitive ratio that a control design strategy which gives decentralized linear time-invariant controllers can achieve is strictly greater than one when relying on local model information. Note that since the optimal control design with full model information is unique (due to Assumption 2.2), even when considering a compact set of plants, the competitive ratio is strictly larger than one for limited model information control design strategies. In this paper, we generalize the formulation of [11] to include adaptive controllers. We prove in next section that we can achieve a competitive ratio equal to one for adaptive controllers. Therefore, we can achieve the optimal performance asymptotically, even if the complete model of the system is not known in advance when designing the subcontrollers.

Algorithm 1 Control design strategy $\Gamma^*(P)$.

```
Parameter: $\{\mu(k)\}_{k=0}^{\infty}$ such that $\lim_{k\to\infty} \mu(k) = \infty$ but $\mu(k) = o(\log(k))$.
Initialize $(A^{(i)}(0), B^{(i)}(0))$ for all $i \in \{1, \dots, N\}$.
for $k = 1, 2, \dots$ do
  for $i = 1, 2, \dots, N$ do
    if $k = 2, 4, \dots$ then
      Update subsystem $i$ estimate as
        $(A^{(i)}(k), B^{(i)}(k)) = \arg\min_{(\hat{A},\hat{B}) \in \mathcal{A}\times\mathcal{B}} \mathbf{W}(\hat{A}, \hat{B}, \mathcal{F}_k),$
          subject to $\hat{A}_{\ell j} = A_{\ell j}, \hat{B}_{\ell\ell} = B_{\ell\ell}, \forall\, j, \ell \in \{1, \dots, N\}, (s_{\mathcal{C}})_{\ell i} \neq 0,$
                     $\hat{A}_{zq} = 0, \forall\, z, q \in \{1, \dots, N\}, (s_{\mathcal{P}})_{zq} = 0,$
      where
        $\mathbf{W}(\hat{A}, \hat{B}, \mathcal{F}_k) = \mu(k)\,\mathrm{tr}(\mathbf{P}(\hat{A}, \hat{B})) + \sum_{t=1}^{k} \|x(t) - \hat{A}x(t-1) - \hat{B}u(t-1)\|_2^2.$
    else
      $(A^{(i)}(k), B^{(i)}(k)) \leftarrow (A^{(i)}(k-1), B^{(i)}(k-1))$.
    end if
    $K^{(i)}(k) \leftarrow \mathbf{L}(A^{(i)}(k)\ B^{(i)}(k))$.
    $u_i(k) \leftarrow \mathbf{T}_i K^{(i)}(k) x(k)$.
  end for
end for
```

3 Main Results

We introduce a specific control design strategy Γ^*, and subsequently, prove that Γ^* is a minimizer of both the average and supremum competitive ratios $r_{\mathcal{P}}^{\mathrm{ave}}$ and $r_{\mathcal{P}}^{\mathrm{sup}}$. For each plant $P \in \mathcal{P}$, this control design strategy constructs an adaptive controller $\Gamma^*(P)$ using a modified version of the Campi–Kumar adaptive algorithm [15], see Algorithm 1. Note that in the Campi–Kumar adaptive algorithm, a central controller estimates the model of the system and control the system. However, in our modified Campi–Kumar adaptive algorithm in Algorithm 1, each subcontroller estimates the model of the system independently and control its corresponding subsystem separately. Hence, each adaptive subcontroller arrives at different model estimates.

In Algorithm 1, we use the notation $(A^{(i)}(k), B^{(i)}(k))$, at each time step $k \in \mathbb{N}_0$, to denote subsystem i's estimate of the global system model $P = (A, B)$. Furthermore, for each $1 \leq i \leq N$, we use the mapping $\mathbf{T}_i : \mathbb{R}^{m\times n} \to \mathbb{R}^{m_i \times n}$ defined as

$$\mathbf{T}_i \begin{bmatrix} X_{11} & \cdots & X_{1N} \\ \vdots & \ddots & \vdots \\ X_{N1} & \cdots & X_{NN} \end{bmatrix} = \begin{bmatrix} X_{i1} & \cdots & X_{iN} \end{bmatrix},$$

where $X_{\ell j} \in \mathbb{R}^{m_\ell \times n_j}$ for each $1 \leq \ell, j \leq N$. Let us also, for all $k \in \mathbb{N}_0$, introduce the notation

$$K(k) = \begin{bmatrix} \mathbf{T}_1 K^{(1)}(k) \\ \vdots \\ \mathbf{T}_N K^{(N)}(k) \end{bmatrix} \in \mathbb{R}^{m\times n},$$

where matrices $K^{(i)}(k)$ are defined in Algorithm 1. For each $\delta > 0$, we introduce

$$\mathcal{W}_\delta(A, B) := \{(\bar{A}, \bar{B}) \in \mathcal{A}\times\mathcal{B} \mid \|[A + B\mathbf{L}(\bar{A}, \bar{B})] - [\bar{A} + \bar{B}\mathbf{L}(\bar{A}, \bar{B})]\| \geq \delta\}.$$

Let us start by presenting a result on the convergence of the global plant model estimates to the correct value.

Lemma 3.1 *Let* $\mathbf{K} = \Gamma^*(P)$ *be defined in Algorithm 1 for a given plant* $P = (A, B) \in \mathcal{P}$. *There exists a set* $\mathcal{N} \subset \mathcal{P}$ *with zero Lebesgue measure such that, if* $P \notin \mathcal{N}$, *then*

$$\lim_{k\to\infty} \mathbf{P}(A^{(i)}(k)\ B^{(i)}(k)) \overset{as}{\leq} \mathbf{P}(A, B). \tag{5}$$

and

$$\sum_{t=0}^{k} \chi((A^{(i)}(k), B^{(i)}(k)) \in \mathcal{W}_\delta(A, B)) \overset{as}{=} O(\mu(k)), \tag{6}$$

$$\sum_{t=0}^{k} \chi(\|K^{(i)}(k) - \mathbf{L}(A, B)\| > \rho) \overset{as}{=} O(\mu(k)), \tag{7}$$

$$\sum_{t=0}^{k} \chi(\|K(k) - \mathbf{L}(A, B)\| > \rho) \overset{as}{=} O(\mu(k)), \tag{8}$$

for all $\delta > 0$, *where* $x \overset{as}{=} y$ *and* $x \overset{as}{\leq} y$ *mean* $\mathbb{P}\{x = y\} = 1$ *and* $\mathbb{P}\{x \leq y\} = 1$, *respectively. In addition, we get*

$$\limsup_{T\to\infty} \frac{1}{T} \sum_{k=0}^{T-1} \|x(k)\|^p + \|u(k)\|^p \overset{as}{<} \infty,\ \forall\, p \geq 1. \tag{9}$$

Proof: See Appendix B. ■

Note that, according to Lemma 3.1, we know that there exists a set $\mathcal{N} \subset \mathcal{P}$ with zero Lebesgue measure such that, if $P \notin \mathcal{N}$, the estimates in the modified Campi–Kumar adaptive algorithm (Algorithm 1) converge to the correct global plant model. This fact is a direct consequence of the use of regularized maximum likelihood estimators in the Campi–Kumar algorithm [19]. We need the following lemma.

Lemma 3.2 *For any matrices* $X, P, Y \in \mathbb{R}^{n\times n}$, *we have*

$$\|X^\top P X - Y^\top P Y\| \leq \|P\|\|X - Y\|(\|X\| + \|Y\|).$$

Proof: See Appendix C. ■

Now, we are ready to present the main result of this section.

Theorem 3.3 *Let* $\mathbf{K} = \Gamma^*(P)$ *be defined in Algorithm 1 for a given plant* $P = (A, B) \in \mathcal{P}$. *There exists a set* $\mathcal{N} \subset \mathcal{P}$ *with zero Lebesgue measure such that, if* $P \notin \mathcal{N}$, *then*

$$J_P(\Gamma^*(P)) \overset{as}{=} J_P(\mathbf{K}^*(P)).$$

Proof: The proof follows the same reasoning as in [15]. According to [20, p.158], for all $1 \leq i \leq N$, we get the set of equations in

$$\begin{aligned}
&\mathrm{tr}\{\mathbf{P}(A^{(i)}(k), B^{(i)}(k))\} + x(k)^\top \mathbf{P}(A^{(i)}(k), B^{(i)}(k))x(k) \\
&\quad = x(k)^\top Q x(k) + u^{(i)}(k)^\top R u^{(i)}(k) + \mathbb{E}\{(A^{(i)}(k)x(k) + B^{(i)}(k)u^{(i)}(k) + w(k))^\top \\
&\qquad\qquad \times \mathbf{P}(A^{(i)}(k), B^{(i)}(k))(A^{(i)}(k)x(k) + B^{(i)}(k)u^{(i)}(k) + w(k)) \mid \mathcal{F}_{k-1}\} \\
&\quad = x(k)^\top Q x(k) + u^{(i)}(k)^\top R u^{(i)}(k) + \mathbb{E}\{x(k+1)^\top \mathbf{P}(A^{(i)}(k), B^{(i)}(k))x(k+1) \mid \mathcal{F}_{k-1}\} \\
&\qquad\qquad + (A^{(i)}(k)x(k) + B^{(i)}(k)u^{(i)}(k))^\top \mathbf{P}(A^{(i)}(k), B^{(i)}(k))(A^{(i)}(k)x(k) + B^{(i)}(k)u^{(i)}(k)) \\
&\qquad\qquad - (Ax(k) + Bu(k))^\top \mathbf{P}(A^{(i)}(k), B^{(i)}(k))(Ax(k) + Bu(k)),
\end{aligned} \tag{10}$$

with $u^{(i)}(k) = K^{(i)}(k)x(k)$ and $u(k) = K(k)x(k)$. Averaging both sides of (10) over time and all subsystems, we get

$$\begin{aligned}
&\zeta_1(T) + \frac{1}{NT}\sum_{k=0}^{T-1}\sum_{i=1}^{N} x(k)^\top \mathbf{P}(A^{(i)}(k), B^{(i)}(k))x(k) = \frac{1}{NT}\sum_{k=0}^{T-1}\sum_{i=1}^{N} u^{(i)}(k)^\top R u^{(i)}(k) \\
&+ \frac{1}{T}\sum_{k=0}^{T-1} x(k)^\top Q x(k) + \frac{1}{NT}\sum_{k=0}^{T-1}\sum_{i=1}^{N} \mathbb{E}\{x(k+1)^\top \mathbf{P}(A^{(i)}(k), B^{(i)}(k))x(k+1) \mid \mathcal{F}_{k-1}\} + \zeta_2(T),
\end{aligned} \tag{11}$$

where

$$\zeta_1(T) = \frac{1}{NT}\sum_{k=0}^{T-1}\sum_{i=1}^{N}\mathrm{tr}\{\mathbf{P}(A^{(i)}(k), B^{(i)}(k))\},$$

and

$$\begin{aligned}\zeta_2(T) = \frac{1}{NT}\sum_{k=0}^{T-1}\sum_{i=1}^{N}&(A^{(i)}(k)x(k) + B^{(i)}(k)u^{(i)}(k))^\top\mathbf{P}(A^{(i)}(k), B^{(i)}(k))(A^{(i)}(k)x(k) + B^{(i)}(k)u^{(i)}(k))\\ &- (Ax(k) + Bu(k))^\top\mathbf{P}(A^{(i)}(k), B^{(i)}(k))(Ax(k) + Bu(k)).\end{aligned} \tag{12}$$

Subtracting $\frac{1}{NT}\sum_{k=0}^{T-1}\sum_{i=1}^{N}\mathbb{E}\{x(k+1)^\top\mathbf{P}(A^{(i)}(k+1), B^{(i)}(k+1))x(k+1) \mid \mathcal{F}_{k-1}\}$, from both sides of (11) while adding and subtracting $\frac{1}{T}\sum_{k=0}^{T-1}u(k)^\top Ru(k)$ from right-hand side of (11), we get

$$\frac{1}{T}\sum_{k=0}^{T-1}[x(k)^\top Qx(k) + u(k)^\top Ru(k)] + \zeta_4(T) + \zeta_5(T) + \zeta_2(T) = \zeta_1(T) + \zeta_3(T), \tag{13}$$

where

$$\begin{aligned}\zeta_3(T) = \frac{1}{NT}\sum_{k=0}^{T-1}\sum_{i=1}^{N}&x(k)^\top\mathbf{P}(A^{(i)}(k), B^{(i)}(k))x(k)\\ &- \mathbb{E}\{x(k+1)^\top\mathbf{P}(A^{(i)}(k+1), B^{(i)}(k+1))x(k+1) \mid \mathcal{F}_{k-1}\},\end{aligned}$$

$$\zeta_4(T) = \frac{1}{NT}\sum_{k=0}^{T-1}\sum_{i=1}^{N}u^{(i)}(k)^\top Ru^{(i)}(k) - u(k)^\top Ru(k),$$

and

$$\zeta_5(T) = \frac{1}{NT}\sum_{k=0}^{T-1}\sum_{i=1}^{N}\mathbb{E}\{x(k+1)^\top[\mathbf{P}(A^{(i)}(k), B^{(i)}(k)) - \mathbf{P}(A^{(i)}(k+1), B^{(i)}(k+1))]x(k+1) \mid \mathcal{F}_{k-1}\}.$$

In the rest of the proof, we study the asymptotic behavior of the sequences $\{\zeta_\ell(k)\}_{k=0}^\infty$ for all $1 \leq \ell \leq 5$.

- Asymptotic behavior of $\zeta_1(T)$: First, note that

$$\begin{aligned}\limsup_{T\to\infty}\zeta_1(T) &= \limsup_{T\to\infty}\frac{1}{NT}\sum_{k=0}^{T-1}\sum_{i=1}^{N}\mathrm{tr}\{\mathbf{P}(A^{(i)}(k), B^{(i)}(k))\}\\ &= \frac{1}{N}\sum_{i=1}^{N}\limsup_{T\to\infty}\frac{1}{T}\sum_{k=0}^{T-1}\mathrm{tr}\{\mathbf{P}(A^{(i)}(k), B^{(i)}(k))\}.\end{aligned}$$

Using (5) inside the above identity, we get

$$\limsup_{T\to\infty}\zeta_1(T) \overset{as}{\leq} \mathrm{tr}\{\mathbf{P}(A, B)\}.$$

- Asymptotic behavior of $\zeta_3(T)$: With a similar strategy as in case (B) in the proof of Theorem 6 in [15], we can prove that

$$\begin{aligned}0 \overset{as}{=} \limsup_{T\to\infty}\frac{1}{T}\sum_{k=0}^{T-1}&x(k)^\top\mathbf{P}(A^{(i)}(k), B^{(i)}(k))x(k)\\ &- \mathbb{E}\{x(k+1)^\top\mathbf{P}(A^{(i)}(k+1), B^{(i)}(k+1))x(k+1) \mid \mathcal{F}_{k-1}\}.\end{aligned}$$

Hence, $\limsup_{T\to\infty}\zeta_3(T) \overset{as}{=} 0$.

- Asymptotic behavior of $\zeta_4(T)$: In this case, we have

$$\begin{aligned}\left|\frac{1}{T}\sum_{k=0}^{T-1} u^{(i)}(k)^\top R u^{(i)}(k) - u(k)^\top R u(k)\right| &\le \frac{1}{T}\sum_{k=0}^{T-1} \left|u^{(i)}(k)^\top R u^{(i)}(k) - u(k)^\top R u(k)\right| \\ &\le \frac{1}{T}\sum_{k=0}^{T-1} \|K^{(i)}(k)^\top R K^{(i)}(k) - K(k)^\top R K(k)\| \|x(k)\|^2.\end{aligned}$$

According to Lemma 3.2, we have $\|K^{(i)}(k)^\top R K^{(i)}(k) - K(k)^\top R K(k)\| \le \|R\| \|K^{(i)}(k) - K(k)\| (\|K^{(i)}(k)\| + \|K(k)\|)$. Considering that $\mathbf{L}(\cdot,\cdot)$ is a continuous function of its arguments (see [21]) and $\mathcal{P}$ is a compact set, we know that $\|K^{(i)}(k)\|$ and $\|K(k)\|$ are uniformly bounded. Hence, $\|K^{(i)}(k)\| + \|K(k)\| \le M$. Now, using Cauchy–Schwartz inequality [22], we get

$$\left|\frac{1}{T}\sum_{k=0}^{T-1} u^{(i)}(k)^\top R u^{(i)}(k) - u(k)^\top R u(k)\right|^2 \le \|R\| M \left(\frac{1}{T}\sum_{k=0}^{T-1} \|K^{(i)}(k) - K(k)\|^2\right)\left(\frac{1}{T}\sum_{k=0}^{T-1} \|x(k)\|^4\right).$$

Let us introduce the notation $K^o = \mathbf{L}(A, B)$. Note that, for all $\rho > 0$, we have

$$\frac{1}{T}\sum_{k=0}^{T-1} \|K^{(i)}(k) - K^o\|^2 \le \rho^2 + \frac{1}{T}\sum_{k=0}^{T-1} \|K^{(i)}(k) - K^o\|^2 \chi(\|K^{(i)}(k) - K^o\| > \rho).$$

Again, considering the facts that $\mathbf{L}(\cdot,\cdot)$ is a continuous function of its arguments and $\mathcal{P}$ is a compact set, we know that $\|K^{(i)}(k) - K^o\|$ is uniformly bounded. Thus, using (7) from Theorem 3.1, we can show that $\limsup_{T\to\infty} \frac{1}{T}\sum_{k=0}^{T-1} \|K^{(i)}(k) - K^o\| \overset{as}{\le} \rho^2$, for all $\rho > 0$. Since the choice of ρ was arbitrary, we get $\limsup_{T\to\infty} \frac{1}{T}\sum_{k=0}^{T-1} \|K^{(i)}(k) - K^o\|^2 \overset{as}{=} 0$. With a similar reasoning, we can also prove that $\limsup_{T\to\infty} \frac{1}{T}\sum_{k=0}^{T-1} \|K(k) - K^o\|^2 \overset{as}{=} 0$. Therefore, considering that $\|K^{(i)}(k) - K(k)\|^2 \le \|K^{(i)}(k) - K^o\|^2 + \|K(k) - K^o\|^2$, we have $\limsup_{T\to\infty} \frac{1}{T}\sum_{k=0}^{T-1} \|K^{(i)}(k) - K(k)\|^2 \overset{as}{=} 0$. Hence, $\limsup_{T\to\infty} \zeta_4(T) \overset{as}{=} 0$ due to the fact that $\limsup_{T\to\infty} \|x(k)\|^4 \overset{as}{<} \infty$ according to (9).

- Asymptotic behavior of $\zeta_5(T)$: With the same approach as in case (C) in the proof of Theorem 6 in [15], we can prove $\limsup_{T\to\infty} \zeta_5(T) \overset{as}{=} 0$.
- Asymptotic behavior of $\zeta_2(T)$: Let us start with studying the asymptotic behavior of the sequence $\{\hat{\zeta}_2^{(i)}(T)\}_{T=0}^{\infty}$ where

$$\begin{aligned}\hat{\zeta}_2^{(i)}(T) = \frac{1}{T}\sum_{k=0}^{T-1} & x(k)^\top (A^{(i)}(k) + B^{(i)}(k)K^{(i)}(k))^\top \mathbf{P}(A^{(i)}(k), B^{(i)}(k))(A^{(i)}(k) + B^{(i)}(k)K^{(i)}(k))x(k) \\ & - x(k)^\top (A + BK(k))^\top \mathbf{P}(A^{(i)}(k), B^{(i)}(k))(A + BK(k))x(k).\end{aligned} \tag{14}$$

Using Lemma 3.2, we can upper bound each term as

$$\begin{aligned} & x(k)^\top (A^{(i)}(k) + B^{(i)}(k)K^{(i)}(k))^\top \mathbf{P}(A^{(i)}(k), B^{(i)}(k))(A^{(i)}(k) + B^{(i)}(k)K^{(i)}(k))x(k) \\ & \quad - x(k)^\top (A + BK(k))^\top \mathbf{P}(A^{(i)}(k), B^{(i)}(k))(A + BK(k))x(k) \\ & \le \|x(k)\| \left\|\mathbf{P}(A^{(i)}(k), B^{(i)}(k))\right\| \left\|[A^{(i)}(k) + B^{(i)}(k)K^{(i)}(k)] - [A + BK(k)]\right\| \\ & \quad \times \left\|[A^{(i)}(k) + B^{(i)}(k)K^{(i)}(k)] + [A + BK(k)]\right\|.\end{aligned} \tag{15}$$

Considering again that $\mathbf{L}(\cdot,\cdot)$ and $\mathbf{P}(\cdot,\cdot)$ are continuous functions of their arguments (see [21]) and $\mathcal{P}$ is a compact set, we know that

$$\begin{aligned}\left\|\mathbf{P}(A^{(i)}(k), B^{(i)}(k))\right\| &\le M_1, \\ \left\|[A^{(i)}(k) + B^{(i)}(k)K^{(i)}(k)] + [A + BK(k)]\right\| &\le M_2.\end{aligned}$$

Using Cauchy–Schwartz inequality, we get the inequality in

$$\begin{aligned}\hat{\zeta}_2^{(i)}(T) &\leq M_1M_2\frac{1}{T}\sum_{k=0}^{T-1}\|x(k)\|^2\left\|[A^{(i)}(k)+B^{(i)}(k)K^{(i)}(k)]-[A+BK(k)]\right\|\\ &\leq M_1M_2\left(\frac{1}{T}\sum_{k=0}^{T-1}\|x(k)\|^4\right)^{1/2}\left(\frac{1}{T}\sum_{k=0}^{T-1}\left\|[A^{(i)}(k)+B^{(i)}(k)K^{(i)}(k)]-[A+BK(k)]\right\|^2\right)^{1/2}.\end{aligned} \tag{16}$$

Now, note that

$$\begin{aligned}\left\|[A^{(i)}(k)+B^{(i)}(k)K^{(i)}(k)]-[A+BK(k)]\right\|^2 &\leq \left\|[A^{(i)}(k)+B^{(i)}(k)K^{(i)}(k)]-[A+BK^{(i)}(k)]\right\|^2\\ &\quad+\|[A+BK^{(i)}(k)]-[A+BK^o]\|^2\\ &\quad+\|[A+BK^o]-[A+BK(k)]\|^2\\ &\leq \left\|[A^{(i)}(k)+B^{(i)}(k)K^{(i)}(k)]-[A+BK^{(i)}(k)]\right\|^2\\ &\quad+\|B\|^2\left(\|K^{(i)}(k)-K^o\|^2+\|K(k)-K^o\|^2\right).\end{aligned}$$

Hence, with similar argument as above, we can prove that $\limsup_{T\to\infty}\hat{\zeta}_2^{(i)}(T)\overset{as}{=}0$, and as a result $\limsup_{T\to\infty}\zeta_2(T)=\limsup_{T\to\infty}\frac{1}{N}\sum_{i=1}^{N}\hat{\zeta}_2^{(i)}(T)\overset{as}{=}0$. Now, we are ready to prove the statement of this theorem. From the asymptotic behavior of sequences $\zeta_1(T)$ and $\zeta_3(T)$, we know that

$$\mathrm{tr}\{\mathbf{P}(A,B)\}\overset{as}{\geq}\limsup_{T\to\infty}\zeta_1(T)+\zeta_3(T). \tag{17}$$

Using identity (13) inside inequality (17) shows that

$$\mathrm{tr}\{\mathbf{P}(A,B)\}\overset{as}{\geq}\limsup_{T\to\infty}\zeta_4(T)+\zeta_5(T)+\zeta_2(T)+\limsup_{T\to\infty}\frac{1}{T}\sum_{k=0}^{T-1}[x(k)^\top Qx(k)+u(k)^\top Ru(k)],$$

which result in

$$\mathrm{tr}\{\mathbf{P}(A,B)\}\overset{as}{\geq}\limsup_{T\to\infty}\frac{1}{T}\sum_{k=0}^{T-1}[x(k)^\top Qx(k)+u(k)^\top Ru(k)].$$

This inequality finishes the proof. ■

Now, we are ready to present the solution of problem (4).

Corollary 3.4 *For any plant graph $G_{\mathcal{P}}$ and design graph $G_{\mathcal{C}}$, we get $r_{\mathcal{P}}^{\mathrm{ave}}(\Gamma^*)\overset{as}{=}1$, and $r_{\mathcal{P}}^{\mathrm{sup}}(\Gamma^*)\overset{as}{=}1$.*

Proof: The proof is a direct consequence of Theorem 3.3 and Lemma 2.1. ■

Corollary 3.4 shows that, irrespective of the plant graph $G_{\mathcal{P}}$ and design graph $G_{\mathcal{C}}$, there exists a limited model information control design strategy that can achieve a competitive ratio equal one. This control design strategy gives adaptive controllers achieving asymptotically the closed-loop performance of optimal control design strategy with full model information. Note that earlier results stated that such competitive ratio cannot be achieved by static or linear time-invariant dynamic controllers [8–14].

4 Example

As a simple numerical example, let us consider the problem of regulating the distance between N vehicles in a platoon. We model vehicle i, $1\leq i\leq N$, as

$$\begin{bmatrix}x_i(k+1)\\ v_i(k+1)\end{bmatrix}=\left(I+\Delta T\begin{bmatrix}0 & 1\\ 0 & -\alpha_i/m_i\end{bmatrix}\right)\begin{bmatrix}x_i(k)\\ v_i(k)\end{bmatrix}+\begin{bmatrix}0\\ \Delta T\beta_i/m\end{bmatrix}\bar{u}_i(k)+\begin{bmatrix}\bar{w}_1^i(k)\\ \bar{w}_2^i(k)\end{bmatrix},$$

where $x_i(k)$ is the vehicle position, $v_i(k)$ its velocity, m_i the mass, α_i the viscous drag coefficient, β_i the power conversion quality coefficient, and ΔT the sampling time. For each vehicle, stochastic exogenous inputs $\bar{w}^i_j(k) \in \mathbb{R}^n$, $j = 1, 2$, capture the effect of wind, road quality, friction, etc. For simplicity of presentation, let us consider the case of $N = 2$ vehicles. In addition, assume that $\Delta T = 1$. As performance objective, the designer wants to minimize the cost function

$$J = \limsup_{T\to\infty} \frac{1}{T} \sum_{k=0}^{T-1} \left[q_d(x_1(k) - x_2(k) - d^*)^2 + \sum_{i=1,2} q_v(v_i(k) - v^*)^2 + r(\bar{u}_i(k) - \bar{u}_i^*)^2 \right],$$

to regulate the distance between the trucks with minimum control effort. Note that $\bar{u}_i^* = \alpha_i v^*/\beta_i$ is the average control signal. We can write the reduced-order system using the distance between vehicles and their velocities as state variables in the form

$$z(k+1) = Az(k) + Bu(k) + w(k), \; z(0) = 0, \tag{18}$$

where

$$\begin{aligned} z(k) &= [v_1(k) - v^* \;,\; x_1(k) - x_2(k) - d^* \;,\; v_2(k) - v^*]^\top, \\ u(k) &= [\bar{u}_1(k) - \bar{u}_1^* \;,\; \bar{u}_2(k) - \bar{u}_2^*]^\top, \\ w(k) &= [\bar{w}_2^1(k) \;,\; \bar{w}_1^1(k) + \bar{w}_1^2(k) \;,\; \bar{w}_2^2(k)]^\top, \end{aligned}$$

and

$$A = \begin{bmatrix} 1 - \frac{\alpha_1}{m_1} & 0 & 0 \\ 1 & 1 & -1 \\ 0 & 0 & 1 - \frac{\alpha_2}{m_2} \end{bmatrix}, \quad B = \begin{bmatrix} \frac{\beta_1}{m_1} & 0 \\ 0 & 0 \\ 0 & \frac{\beta_2}{m_2} \end{bmatrix}.$$

This model leads to

$$J = \limsup_{T\to\infty} \frac{1}{T} \sum_{k=0}^{T-1} z(k)^T Q z(k) + u(k)^T R u(k), \tag{19}$$

where $Q = \operatorname{diag}(q_v, q_d, q_v)$ and $R = \operatorname{diag}(r, r)$. To simplify the presentation, let $Q = I$ and $R = I$.

Note that $z(0) = 0$ in (18) indicates that the vehicles start from desired distance d^* of each other and with velocity v^*. However, due to the exogenous inputs $w(k)$, the vehicles will drift away from this ideal situation. By minimizing the closed-loop performance criterion in (19), the designer minimizes this drift using the least control effort possible.

We define the first subsystem as $\underline{z}_1(k) = z_1(k)$ and the second subsystem as $\underline{z}_2(k) = [z_2(k)\; z_3(k)]^T$. Therefore, we get

$$\underline{z}_1(k+1) = a_{11}\underline{z}_1(k) + b_{11}u_1(k) + w_1(k),$$

and

$$\underline{z}_2(k+1) = \begin{bmatrix} 1 \\ 0 \end{bmatrix} \underline{z}_1(k) + \begin{bmatrix} 1 & -1 \\ 0 & a_{22} \end{bmatrix} \underline{z}_2(k) + b_{22}u_2(k) + \begin{bmatrix} w_2(k) \\ w_3(k) \end{bmatrix},$$

where (a_{ii}, b_{ii}) are local parameters of subsystem i. Assume that

$$\mathcal{A} = \left\{ A \in \mathbb{R}^{3\times 3} \;\middle|\; A = \begin{bmatrix} a_{11} & 0 & 0 \\ 1 & 1 & -1 \\ 0 & 0 & a_{22} \end{bmatrix}, a_{11}, a_{22} \in [0,1] \right\},$$

$$\mathcal{B} = \left\{ B \in \mathbb{R}^{3\times 2} \;\middle|\; B = \begin{bmatrix} b_{11} & 0 \\ 0 & 0 \\ 0 & b_{22} \end{bmatrix}, b_{11}, b_{22} \in [0.5, 1.5] \right\}.$$

Note that we can verify Assumptions 2.1 and 2.2 using the observability and controllability of structured system, see [23, 24].

We compare the performance of the introduced adaptive controller with a deadbeat control design strategy $\Gamma^\Delta : \mathcal{P} \to \mathbb{R}^{2\times 3}$ for this special family of systems as

$$\Gamma^\Delta(P) = \begin{bmatrix} -a_{11}/b_{11} & 0 & 0 \\ 1/b_{22} & 1/b_{22} & -(1 + a_{22})/b_{22} \end{bmatrix},$$

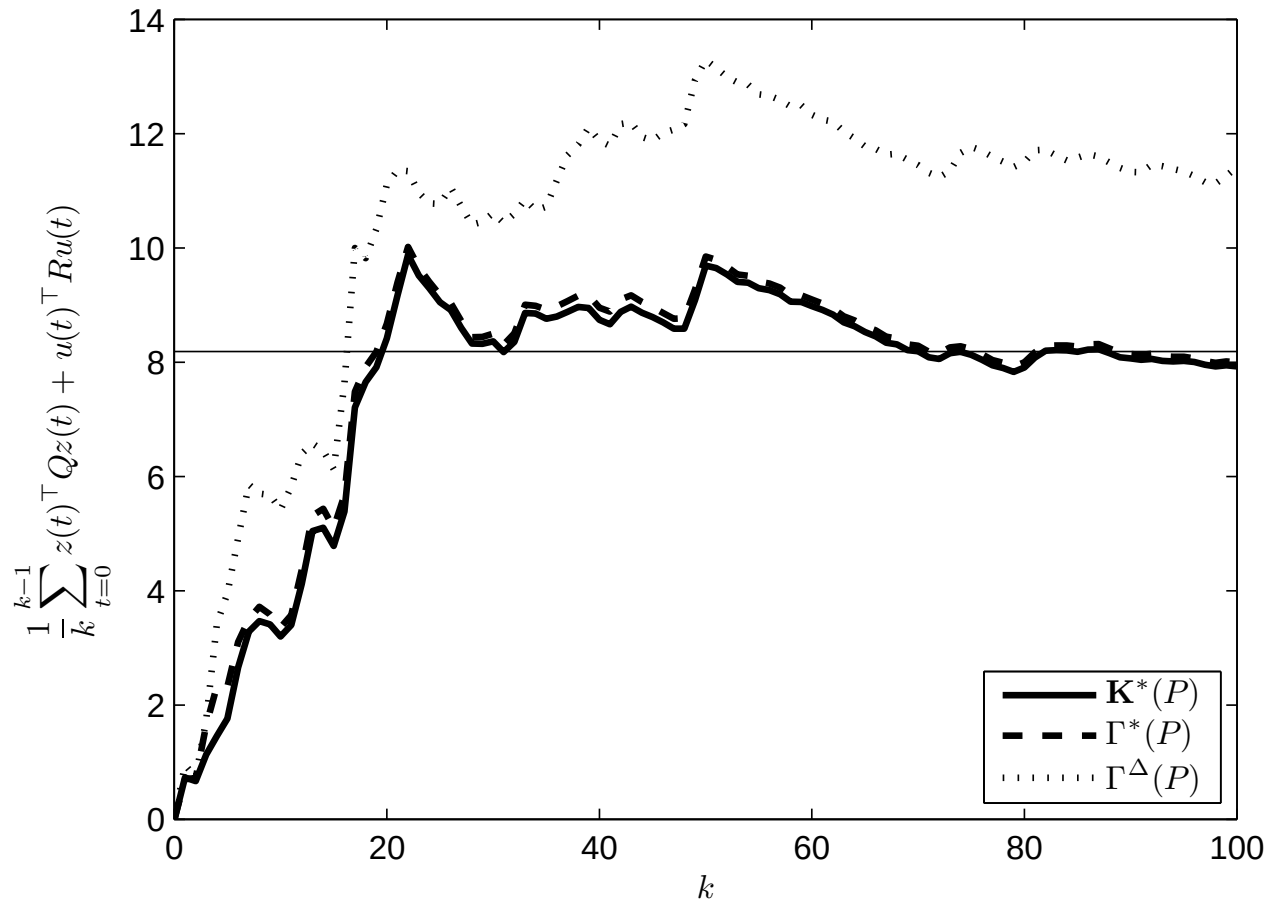

Figure 1: The running cost of the closed-system with different controllers.

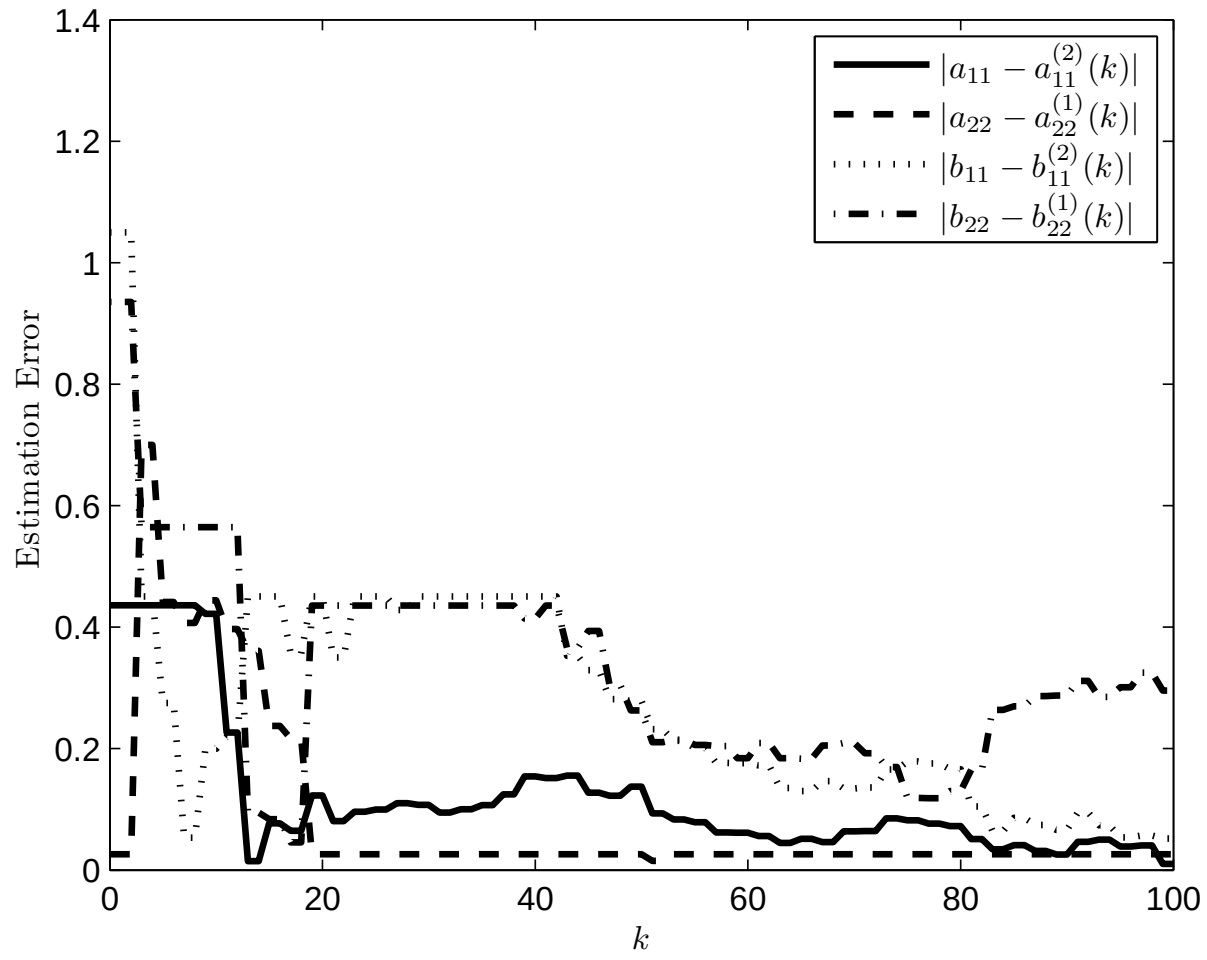

Figure 2: Estimation error of model parameters.

for all $P = (A, B) \in \mathcal{P}$. Note that Γ^Δ is a limited model information control design strategy, because each local controller i is based on only parameters of subsystem i, $i = 1, 2$.

Figure 1 illustrates the running cost of the closed-system with the optimal control design with full model information $\mathbf{K}^*(P)$ (solid curve), the modified Campi-Kumar adaptive controller $\Gamma^*(P)$ (dashed curve), and the deadbeat control design strategy $\Gamma^\Delta(P)$ (dotted curve). The running costs of the closed-system with $\Gamma^*(P)$ and the optimal control design with full model information $\mathbf{K}^*(P)$ both converge to $\mathrm{tr}\{\mathbf{P}(A, B)\}$ (the horizontal line) as time goes to infinity. The cost of the optimal control design strategy with global model knowledge is always lower than the cost of the adaptive controllers. The simulation is done for parameters $(a_{11}, b_{11}) = (0.4360, 1.0497)$ and $(a_{22}, b_{22}) = (0.0259, 0.9353)$. Figure **??** illustrates the convergence of the individual model parameters (a_{ii}, b_{ii}), $i = 1, 2$, for the adaptive subcontrollers. Note that only one of the subsystems need to estimate each parameter (as each one has access to its own model parameters).

5 Conclusion

In this paper, as a generalization of earlier results in optimal control design with limited model information, we searched over the set of control design strategies that construct adaptive controllers. We found a minimizer of the competitive ratio both in average and supremum senses. We used the Campi–Kumar adaptive algorithm to setup an adaptive control design strategy that achieves a competitive ratio equal to one, that is, this adaptive controller asymptotically achieves closed-loop performance equal to the optimal centralized controller with full model information. We illustrated the applicability of this adaptive controller on a vehicle platooning problem. As a future work, we suggest studying decentralized adaptive controllers.

References

[1] S. Massoud Amin and B. F. Wollenberg, “Toward a smart grid: power delivery for the 21st century,” *IEEE Power and Energy Magazine*, vol. 3, no. 5, pp. 34–41, 2005.

[2] R. R. Negenborn, Z. Lukszo, and H. Hellendoorn, *Intelligent Infrastructures.* Springer, 2010.

[3] D. Swaroop, J. K. Hedrick, and S. B. Choi, “Direct adaptive longitudinal control of vehicle platoons,” *IEEE Transactions on Vehicular Technology*, vol. 50, no. 1, pp. 150–161, 2001.

[4] W. Collier and R. Weiland, “Smart cars, smart highways,” *IEEE Spectrum*, vol. 31, no. 4, pp. 27 –33, 1994.

[5] P. Varaiya, “Smart cars on smart roads: problems of control,” *IEEE Transactions on Automatic Control*, vol. 38, no. 2, pp. 195 –207, 1993.

[6] F. Giulietti, L. Pollini, and M. Innocenti, “Autonomous formation flight,” *IEEE Control Systems*, vol. 20, no. 6, pp. 34–44, 2000.

[7] J. Fowler and R. D’Andrea, “A formation flight experiment,” *IEEE Control Systems*, vol. 23, no. 5, pp. 35 –43, 2003.

[8] C. Langbort and J. Delvenne, “Distributed design methods for linear quadratic control and their limitations,” *IEEE Transactions on Automatic Control*, vol. 55, no. 9, pp. 2085–2093, 2010.

[9] F. Farokhi, C. Langbort, and K. H. Johansson, “Control design with limited model information,” in *Proceedings of the American Control Conference*, pp. 4697–4704, 2011.

[10] F. Farokhi, C. Langbort, and K. H. Johansson, “Optimal structured static state-feedback control design with limited model information for fully-actuated systems,” *Accepted for publication in Automatica*, 2012. Preprint: `arXiv:1112.3839 [math.OC]` `http://arxiv.org/abs/1112.3839`.

[11] F. Farokhi and K. H. Johansson, “Dynamic control design based on limited model information,” in *Proceedings of the Annual Allerton Conference on Communication, Control, and Computing*, pp. 1576–1583, 2011.

[12] F. Farokhi, C. Langbort, and K. H. Johansson, “Optimal disturbance accommodation with limited model information,” in *Proceedings of the American Control Conference*, pp. 4757–4764, 2012.

[13] F. Farokhi, C. Langbort, and K. H. Johansson, “Decentralized disturbance accommodation with limited plant model information,” 2012. Submitted. Preprint: `arXiv:1112.5032 [math.OC]` `http://arxiv.org/abs/1112.5032`.

[14] F. Farokhi, “Decentralized control design with limited plant model information,” Licentiate Thesis, 2012. `http://urn.kb.se/resolve?urn=urn:nbn:se:kth:diva-63858`.

[15] M. C. Campi and P. R. Kumar, “Adaptive linear quadratic Gaussian control: The cost-biased approach revisited,” *SIAM Journal on Control and Optimization*, vol. 36, no. 6, pp. 1890–1907, 1998.

[16] M. Prandini and M. C. Campi, “Adaptive LQG control of input-output systems—a cost-biased approach,” *SIAM Journal on Control and Optimization*, vol. 39, no. 5, pp. 1499–1519, 2000.

[17] T. L. Graves and T. L. Lai, “Asymptotically efficient adaptive choice of control laws incontrolled markov chains,” *SIAM Journal on Control and Optimization*, vol. 35, no. 3, pp. 715–743, 1997.

[18] P. R. Kumar, “Optimal adaptive control of Linear-Quadratic-Gaussian systems,” *SIAM Journal on Control and Optimization*, vol. 21, no. 2, pp. 163–178, 1983.

[19] P. R. Kumar, “Convergence of adaptive control schemes using least-squares parameter estimates,” *IEEE Transactions on Automatic Control*, vol. 35, no. 4, pp. 416–424, 1990.

[20] P. R. Kumar and P. P. Varaiya, *Stochastic systems: estimation, identification, and adaptive control.* Prentice Hall, 1986.

[21] D. F. Delchamps, “Analytic stabilization and the algebraic riccati equation,” in *Proceedings of the 22nd IEEE Conference on Decision and Control*, vol. 22, pp. 1396 –1401, 1983.

[22] A. Friedman, *Foundations of Modern Analysis.* Dover, 1970.

[23] C. Lin, “Structural controllability,” *IEEE Transactions on Automatic Control*, vol. 19, no. 3, pp. 201–208, 1974.

[24] J.-M. Dion, C. Commault, and J. van der Woude, “Generic properties and control of linear structured systems: a survey,” *Automatica*, vol. 39, no. 7, pp. 1125 – 1144, 2003.

[25] R. Bhatia and F. Kittaneh, “Norm inequalities for partitioned operators and an application,” *Mathematische Annalen*, vol. 287, pp. 719–726, 1990.

A Proof of Lemma 2.1

Let us assume, without loss of generality, that $r_{\mathcal{P}}^{\mathrm{sup}}(\Gamma) < \infty$ since otherwise, the desired inequality is trivially satisfied. First, note that using Theorem 2.10.1 in [22], function $J_P(\Gamma(P))/J_P(\mathbf{K}^*(P))$ is integrable on $\mathcal{P}$ since we assumed $r_{\mathcal{P}}^{\mathrm{sup}}(\Gamma) = \operatorname{ess\,sup} J_P(\Gamma(P))/J_P(\mathbf{K}^*(P)) < \infty$ (and $\mathcal{P}$ is a compact set thanks to Assumption 2.1). Then, using Theorem 2.7.1 in [22], we get

$$r_{\mathcal{P}}^{\mathrm{ave}}(\Gamma) = \int_{\mathcal{P}} \frac{J_P(\Gamma(P))}{J_P(\mathbf{K}^*(P))} f(P)\, \mathrm{d}P \le \int_{\mathcal{P}} r_{\mathcal{P}}^{\mathrm{sup}}(\Gamma) f(P)\, \mathrm{d}P = r_{\mathcal{P}}^{\mathrm{sup}}(\Gamma).$$

This completes the proof.

B Proof of Lemma 3.1

Equations (5)–(7) are direct consequences of Theorems 2 and 3 in [15]. We start with proving (8). To do so, let us prove $\|K(k) - \mathbf{L}(A,B)\| > \rho$ implies that there exists at least an index i such that $\|\mathbf{T}_i K^{(i)}(k) - \mathbf{T}_i \mathbf{L}(A,B)\| > \rho/\sqrt{N}$. We can prove this fact by contradiction. Assume that there does not exists any index i such that $\|\mathbf{T}_i K^{(i)}(k) - \mathbf{T}_i \mathbf{L}(A,B)\| > \rho/\sqrt{N}$. Therefore, for all $1 \le i \le N$, we have $\|\mathbf{T}_i K^{(i)}(k) - \mathbf{T}_i \mathbf{L}(A,B)\| \le \rho/\sqrt{N}$, and as a result, according to Theorem 1 in [25], we get

$$\|K(k) - \mathbf{L}(A,B)\|^2 \le \sum_{i=1}^{N} \|\mathbf{T}_i K^{(i)}(k) - \mathbf{T}_i \mathbf{L}(A,B)\|^2 \le \rho^2.$$

This is contradictory to the assumption that $\|K(k) - \mathbf{L}(A,B)\| > \rho$. Hence, we proved the implication. Based on this property, it is easy to see that

$$\sum_{t=0}^{k} \chi(\|K(k) - \mathbf{L}(A,B)\| > \rho) \le \sum_{t=0}^{k} \sum_{i=1}^{N} \chi(\|\mathbf{T}_i K^{(i)}(k) - \mathbf{T}_i \mathbf{L}(A,B)\| > \rho/\sqrt{N}). \tag{20}$$

Now, note that $\|\mathbf{T}_i K^{(i)}(k) - \mathbf{T}_i \mathbf{L}(A,B)\| > \rho/\sqrt{N}$ implies that $\|K^{(i)}(k) - \mathbf{L}(A,B)\| > \rho/\sqrt{N}$. Thus, we get

$$\sum_{t=0}^{k} \chi(\|\mathbf{T}_i K^{(i)}(k) - \mathbf{T}_i \mathbf{L}(A,B)\| > \rho/\sqrt{N}) \le \sum_{t=0}^{k} \chi(\|K^{(i)}(k) - \mathbf{L}(A,B)\| > \rho/\sqrt{N}). \tag{21}$$

Substituting (21) inside (20), we get

$$\sum_{t=0}^{k} \chi(\|K(k) - \mathbf{L}(A,B)\| > \rho) \leq \sum_{t=0}^{k} \sum_{i=1}^{N} \chi(\|K^{(i)}(k) - \mathbf{L}(A,B)\| > \rho/\sqrt{N}).$$

Now, using (7), we can show that

$$\sum_{t=0}^{k} \chi(\|K^{(i)}(k) - \mathbf{L}(A,B)\| > \rho/\sqrt{N}) \overset{as}{=} O(\mu(k)),$$

for all $1 \leq i \leq N$. Therefore, we have

$$\sum_{t=0}^{k} \chi(\|K(k) - \mathbf{L}(A,B)\| > \rho) \overset{as}{=} O(\mu(k)).$$

Finally, note that the proof of (9) is a direct result of applying (8) to the proof of Theorem 5 in [15]. This concludes the proof.

C Proof of Lemma 3.2

First, note that

$$(X-Y)^\top P(X+Y) + (X+Y)^\top P(X-Y) = 2(X^\top PX - Y^\top PY).$$

Hence, we get

$$\begin{aligned} 2\|(X^\top PX - Y^\top PY)\| &= \|(X-Y)^\top P(X+Y) + (X+Y)^\top P(X-Y)\| \\ &\leq \|(X-Y)^\top P(X+Y)\| + \|(X+Y)^\top P(X-Y)\| \\ &\leq 2\|P\|\|X-Y\|\|X+Y\| \\ &\leq 2\|P\|\|X-Y\|(\|X\| + \|Y\|). \end{aligned}$$

This concludes the proof.